

# megamount Edge

## TYRE CHANGER



This premium quality tyre changer will meet the demands of busy workshops. The unique bead breaker combines with the 'megafit 2D' assist arm to make easy work of the toughest of tyres.

### KEY FEATURES

- 10" to 26" clamping
- 'Tapered' turret and oversized column assembly for maximum rigidity
- Removable pedal box for easy 'in-house' maintenance
- Can be supplied in traditional lever or lever-less design
- Built in the UK
- Available in 1ph or 3ph
- 3 year warranty (subject to servicing)

### Optional Extras


- Upgrade to lever-less tyre changer available



Evolution Device to convert standard machine into leverless operation



### Overall dimensions (mm)

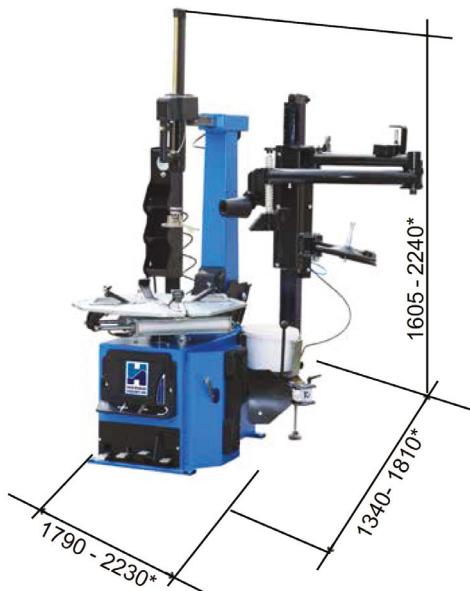

### SPECIFICATIONS

- Rim Clamping Outside: 10"-22"
- Rim Clamping Inside: 12"-26"
- Max. Tyre Diameter: 1100mm (43")
- Max. Tyre Width: 390mm (15")
- Bead breaker cylinder force (10 bar): 30800 N (3140kg)
- Operating Pressure: 8-10 bar (116-145 psi)
- Inflating Pressure Limiting Device: 3,5 bar (50 psi) Max.
- Power Supply: 3Ph 400V 50Hz, 1Ph 220V 50/60Hz
- Maximum Torque: 1200Nm (3Ph)
- Noise Level in Working Conditions: < 70 dB(A)